PNI SafeHome PT710B

Smart video door phone / Interfon video inteligent

EN	User manual	3
RO	Manual de utilizare	8

Tuya Smart APP

Download the **Tuya Smart** app by accessing Google Play or App Store or scan the QR codes below:

Android iOS

Add device in Tuya Smart application

1. Open the application, create an account and log in.
2. Add your device by pressing the **+** icon in the upper right corner of the screen or by clicking the **Add device** button (this button appears when you have no device added to the application).
3. Select the option **Video surveillance** on the left side of the screen.
4. From the list of devices on the right side of the screen, select **Smart Doorbell**

5. In the next interface, select the option **QR Code** from the upper right corner.
6. Then tick **Make sure the indicator is flashing quickly or a prompt tone is heard**. Click **Next**.
7. Select the WiFi network you want to connect to and add the password.
8. Position the smartphone with the QR code in front of the door phone lens. Wait a few seconds until you hear a confirmation beep, and the

light ring on the bell turns purple.

9. Go back to the application and check **I heard a prompt**. The application will immediately start scanning nearby devices.
10. After the app identifies your device, you will receive the confirmation **Added Successfully**.
11. To finish, click the **Done** button.

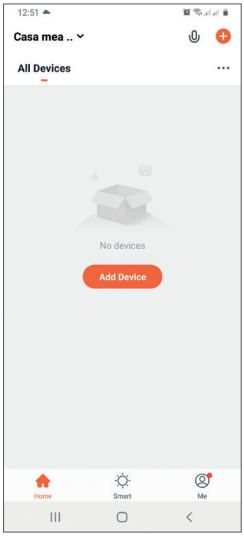

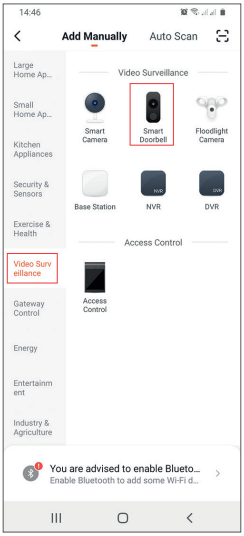

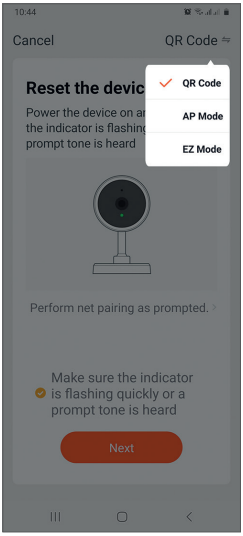

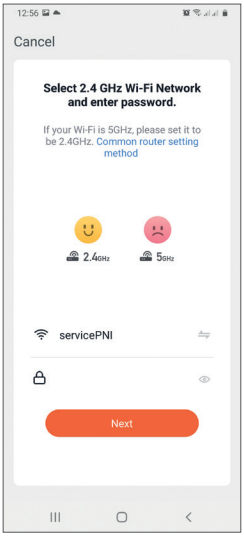

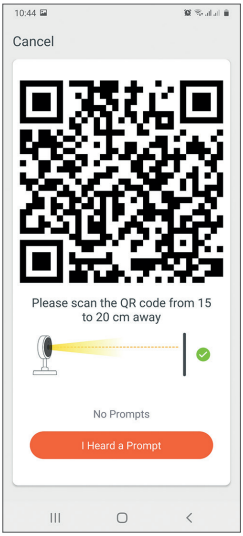

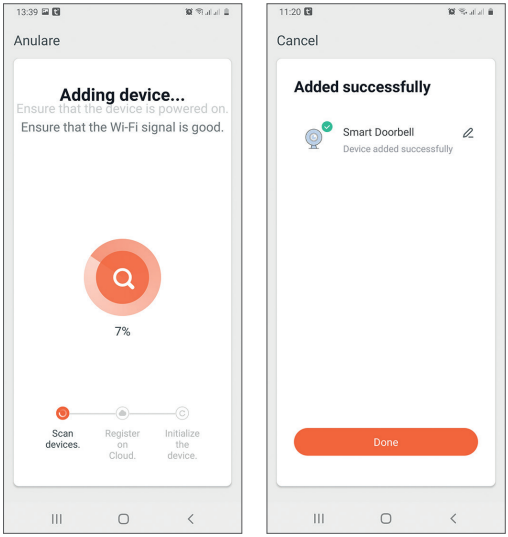

Device control via the application

Options:

1. Snapshot: takes an image and saves it in the phone's memory
2. Intercom: press to talk to the person in front of your door
3. Recording: press to record video. The recording will be saved in the phone memory.
4. View files saved on the SD card inserted in the door phone
5. Cloud storage: cloud access (paid option)
6. View photos and videos saved in the phone memory
7. Access the door phone settings (by clicking on the pencil icon in the upper right corner) to set the sensitivity level of the motion sensor or turn off the PIR sensor, manage power consumption, share your device, or turn on offline notifications and so on.
8. When a visitor rings the bell, you will receive a "You have a visitor" notification on the phone accompanied by a repetitive audible warning.
9. If you enter the application, you can see who is at the door and you can talk to the visitor. You also receive notifications every time the camera detects movement.

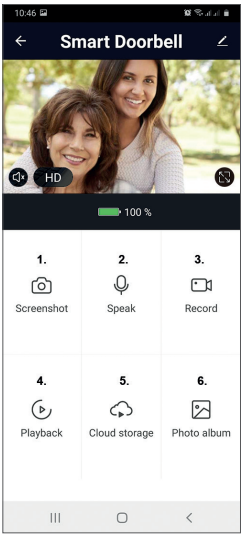
10:46
Smart Doorbell
HD
100 %
1.
Screenshot
2.
Speak
3.
Record
4.
Playback
5.
Cloud storage
6.
Photo album

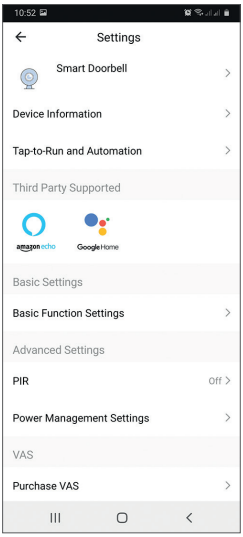
10:52
Settings
Smart Doorbell
Device Information
Tap-to-Run and Automation
Third Party Supported
amazon echo
Google Home
Basic Settings
Basic Function Settings
Advanced Settings
PIR
Off
Power Management Settings
VAS
Purchase VAS

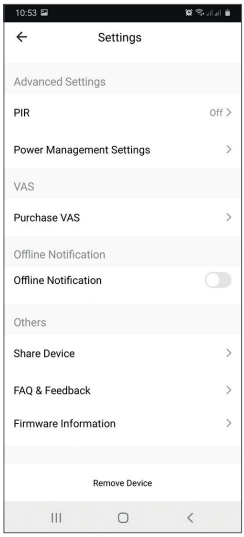
10:53
Settings
Advanced Settings
PIR
Off
Power Management Settings
VAS
Purchase VAS
Offline Notification
Offline Notification
Others
Share Device
FAQ & Feedback
Firmware Information
Remove Device

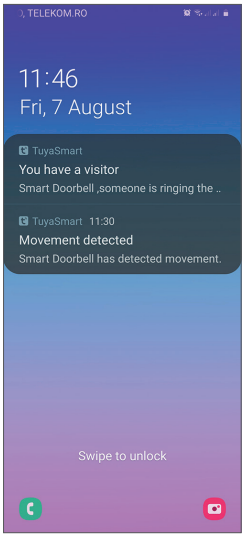
TELEKOM.RO
11:46
Fri, 7 August
TuyaSmart
You have a visitor
Smart Doorbell ,someone is ringing the ..
TuyaSmart 11:30
Movement detected
Smart Doorbell has detected movement.
Swipe to unlock

Technical specifications

Processor	Hi3518E
Sensor	1/3 CMOS
Video resolution	1920 x 1080@25fps
Video compression	H.264/H.265
Audio	Built-in microphone / Built-in speaker
Viewing angle	166°
IR-CUT filter	Yes
IR LEDs	6 pcs. 850mm
Minimum lighting	1 Lux
WiFi	2.4GHz, IEEE 802.11 b/g/n
Storage	Micro SD card, max. 64GB (not included)
PIR	Yes, 3 levels of sensitivity
Power supply	Built-in battery 3.7V type 18650 or external power supply 14V - 24V AC
Current	max. 170mA

Aplicatia Tuya Smart

Descarcati aplicatia **Tuya Smart** accesand Google Play sau App Store sau scanati codurile QR de mai jos:

Android iOS

Adaugare dispozitiv in aplicatia Tuya Smart

1. Deschideti aplicatia, creati-va cont si autentificati-va.
2. Adaugati dispozitivul dvs. apasand pictograma **+** din coltul dreapta sus al ecranului sau apasand butonul **Add device** (acest buton apare atunci cand nu aveti nici un dispozitiv adaugat in aplicatie).
3. Selectati din partea stanga a ecranului optiunea **Video surveillance**.
4. Din lista de dispozitive din partea dreapta a ecranului, selectati **Smart Doorbell**

5. In interfata urmatoare selectati din coltul dreapta sus optiunea **QR Code**.
6. Apoi bifati **Make sure the indicator is flashing quickly or a prompt tone is heard**. Click **Next**.
7. Selectati reteaua WiFi la care doriti sa va conectati si adaugati parola.
8. Pozitionati codul QR din aplicatie in fata obiectivului soneriei inteligente. Asteptati cateva secunde pana auziti un beep de confirmare, iar inelul

luminos de pe sonerie devine violet.

9. Intorceti-va in aplicatie si bifati **I heard a prompt**. Aplicatia va incepe imediat scanarea dispozitivelor din apropiere.
10. Dupa ce va identifica dispozitivul dvs., veti primi confirmarea **Added Successfully**.
11. Pentru a finaliza, faceti click pe butonul **Done**.

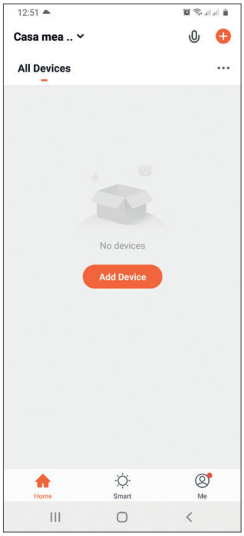

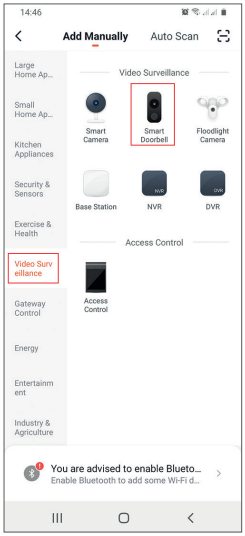

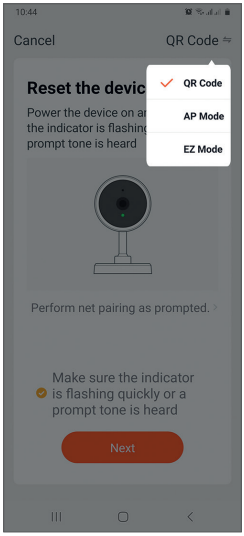

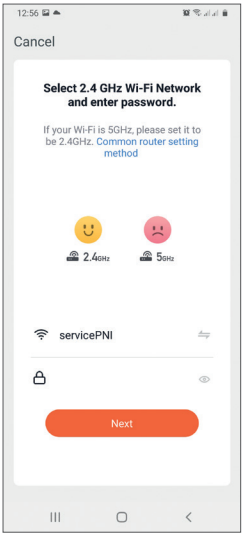

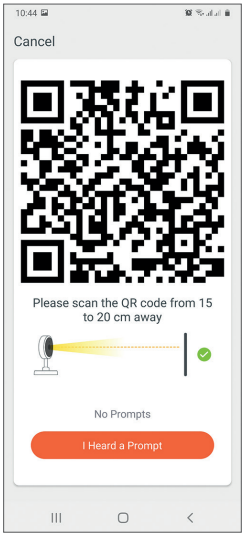

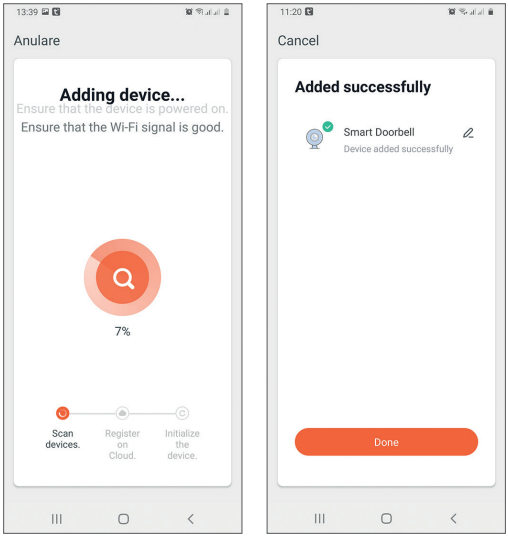

Control dispozitiv din aplicatie

Optiuni:

1. Captura imagine: preia o imagine si o salveaza in memoria telefonului
2. Intercom: apasati pentru a vorbi cu persoana aflata in fata usii
3. Inregistrare: apasati pentru a inregistra video. Inregistrarea va fi salvata in memoria telefonului.
4. Vizualizare fisiere salvate pe cardul SD introdus in interfon
5. Cloud storage: accesare Cloud (optiune contra cost)
6. Vizualizare foto si video salvate in memoria telefonului
7. Accesati setarile soneriei (facand click pe pictograma sub forma de creion din coltul dreapta sus) pentru a seta nivelul de sensibilitate al senzorului de miscare sau pentru a dezactiva senzorul PIR, pentru a gestiona consumul de energie, pentru a partaja dispozitivul sau pentru a activa notificarile offline si altele.
8. Cand un vizitator la suna la sonerie, pe telefon veti primi o notificare “You have a visitor“ insotita de o avertizare sonora repetitiva.
9. Puteti intra in aplicatie pe soneria respectiva, puteti vedea cine este la usa si puteti vorbi cu vizitatorul. De asemenea, primiti notificari de fiecare data cand camera detecteaza miscare in campul sau.

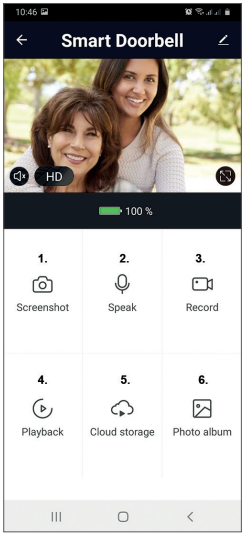
10:46
Smart Doorbell
HD
100 %
1.
Screenshot
2.
Speak
3.
Record
4.
Playback
5.
Cloud storage
6.
Photo album

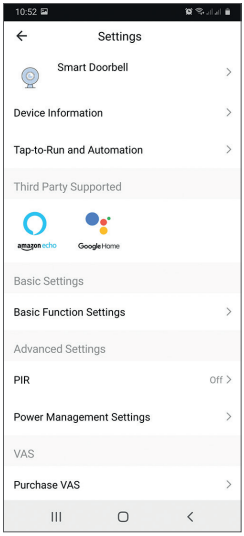
10:52
Settings
Smart Doorbell
Device Information
Tap-to-Run and Automation
Third Party Supported
amazon echo
Google Home
Basic Settings
Basic Function Settings
Advanced Settings
PIR
Off
Power Management Settings
VAS
Purchase VAS

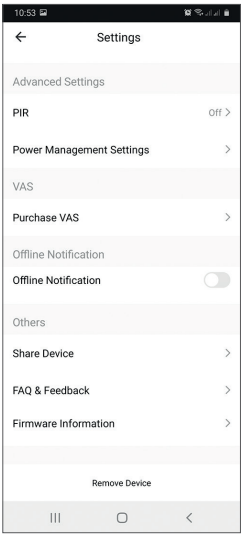
10:53
Settings
Advanced Settings
PIR
Off
Power Management Settings
VAS
Purchase VAS
Offline Notification
Offline Notification
Others
Share Device
FAQ & Feedback
Firmware Information
Remove Device

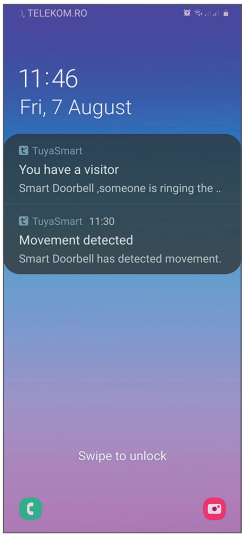
), TELEKOM.RO
11:46
Fri, 7 August
TuyaSmart
You have a visitor
Smart Doorbell ,someone is ringing the ..
TuyaSmart 11:30
Movement detected
Smart Doorbell has detected movement.
Swipe to unlock

Specificatii tehnice

Procesor	Hi3518E
Senzor	1/3 CMOS
Rezolutie video	1920 x 1080@25fps
Compresie video	H.264/H.265
Audio	Microfon incorporat / Difuzor incorporat
Unghi de vizualizare	166°
Filtru IR-CUT	Da
Leduri IR	6 buc. 850mm
Iluminare minima	1 Lux
WiFi	2.4GHz, IEEE 802.11 b/g/n
Stocare	Card SD, maxim 64GB (nu este inclus)
PIR	Da, 3 niveluri de sensibilitate
Alimentare	Acumulator incorporat 3.7V tip 18650 sau alimentare externa 14V - 24V AC
Consum	maxim 170mA

EN:

EU Simplified Declaration of Conformity

SC ONLINESHOP SRL declares that **Smart video doorphone PNI SafeHome PT710B** complies with the EMC 2014/30/EU and RED 2014/53/UE Directives. The full text of the EU declaration of conformity is available at the following Internet address:
https://www.mypni.eu/products/7289/download/certifications

RO:

Declaratie UE de conformitate simplificata

SC ONLINESHOP SRL declara ca **Interfon video inteligent PNI SafeHome PT710B** este in conformitate cu Directiva EMC 2014/30/EU si RED 2014/53/UE. Textul integral al declaratiei UE de conformitate este disponibil la urmatoarea adresa de internet:
https://www.mypni.eu/products/7289/download/certifications